



Outdoor
Patio Furnishings

Assembly Instructions

For SeaAira Folding Adirondack Chair

Tools Needed: hammer, 7/16" wrench, No drilling is required. All the necessary holes are predrilled. Bolts fit snugly in the holes. You may need to use a hammer to drive the bolts through the holes.



Parts


2 - 3" Carriage bolts with 2 washers and locknut
2 - 3" Lag bolts with 2 washers



Lay the parts on a protected surface such as cardboard or blankets to assemble them.

Step 2 – Fasten the front of the arms

2 - 3" Carriage bolts with 2 washers and locknut, 2 arms

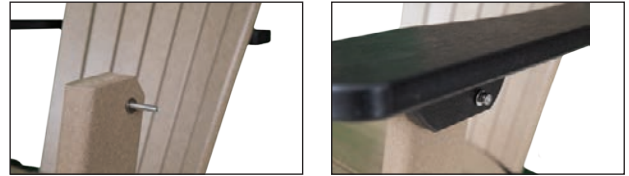

Place a 3" carriage bolt through the leg with the head on the inside of the leg. Tap the bolt head with a hammer to set it firmly against the leg. Place a washer on bolt, then place the arm on the bolt. Place a washer on the outside of the bolt and tighten the nut securely. Repeat for the other arm.

Step 1 – Unfold the chair assembly

Chair assembly



Place the chair assembly on a clean, flat work surface. Fold the back up and lodge the bottom of the back into place. Fold the legs down.



Step 3 – Fasten the back of the arms

2 - 3" Lag bolts with 2 washers



Fasten the back of the arms to the chair back using the 3" lags. Place a washer on the lag, then insert the lag into the arm. Place a second washer on the lag. Tighten the lag securely to the chair back. Be sure your lag follows the pilot hole in the back.

Note: You must place a washer between the fastener heads and between the two pieces of poly wood so the chair folds easily.

Congratulations!
Your SeaAira Folding
Adirondack Chair is
ready to enjoy!



*When installing screws, tighten till the head goes slightly below the surface.