

Assembly Instructions for Poly 8ft Walk-In Table

Tools Needed:

Power drill or screwdriver
#2 Square Drive Bit

Hardware:


60– 2½” Screws

Parts List:

Table Top—1 piece
Table Leg Assemblies—2 pieces
Bench Tops—4 pieces
1”x5½”x14½” Bench Leg Supports—8 pieces
1”x5½”x32” Bench Bottoms—4 pieces


Step 1

Assemble the 4 bench legs. Take two leg supports and attach to a bench bottom. Put two 2½” screws in the predrilled holes in each end of the bench bottom and screw into one end of the leg supports. (See photo 1.)

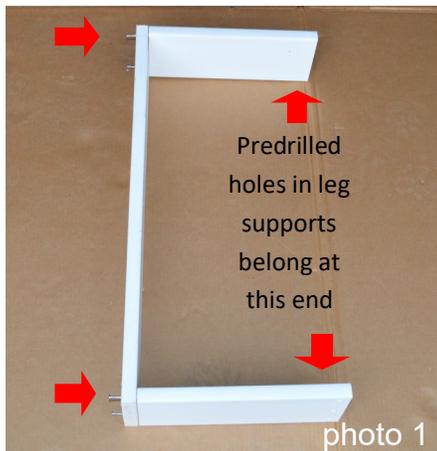

Step 2



Unfold a table leg assembly & place upside down on a table. (See photo 2.) Take a bench top & place upside down with the center 2x2 between the 2x4 table leg support beams. Attach with two 2½” screws on each side. (See photos 2 & 3.)

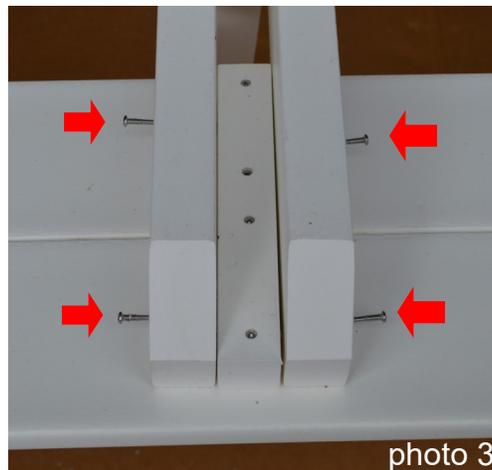

Keep 2x2 even with leg supports

Step 3



Now take the bench leg assemblies from Step 1 and place them on the seat. Center with the 2x2 on the bench top. Attach with two 2½" screws on each end. (See photos 4 & 5.)

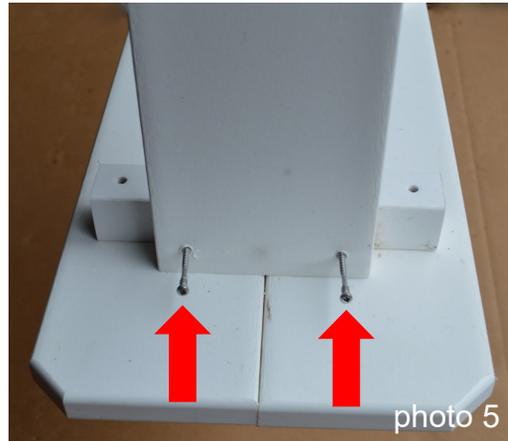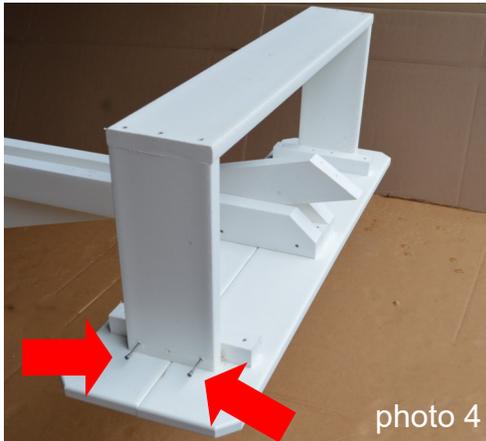

Align with the outside edge of 2x2

Step 4

Fold the center leg down and attach to the bench bottom. Put one 2½" screw in the predrilled hole in the center of the bench bottom and screw up into the leg. (See photo 6.)

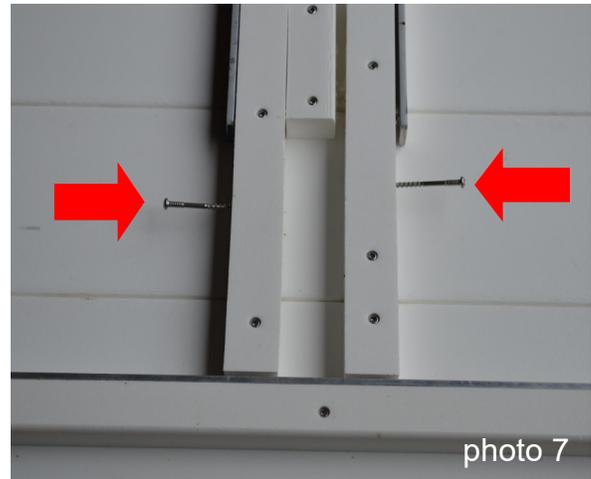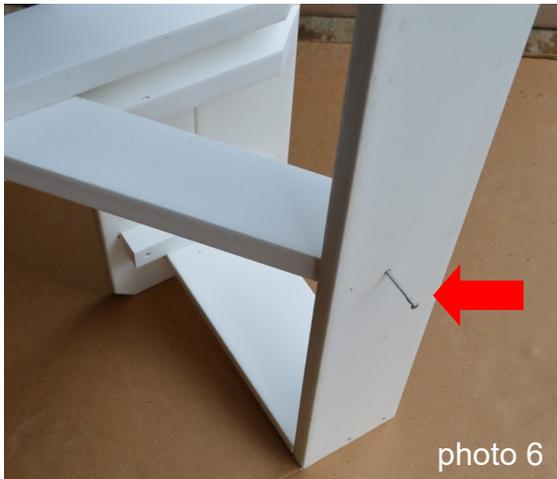

Step 5

Set the assembled leg assemblies on the floor side by side. Space them approximately 14" apart between the bench seats. Place the table top on the 4 legs and latch the legs into the 4 notches between the 2x2 braces underneath the table top. Put one 2½" screw into each 2x2 and screw into the top of the legs. (See photo 7.)