

# Chair


## WHAT'S IN THE BOX...

- 1 - Seat Unit
- 2 - Arm Frames
- 4 - Corner Legs
- 4 - 2" Thumb Bolts
- 8 - 1" Thumb Bolts
- 1 - Back Pillow
- 1 - Seat Pillow




## STEP 1C

Rotate the seat unit on its side to get the same look as photo "A" listed below. Make sure the latch plate is in the up position (As shown in photo "B").

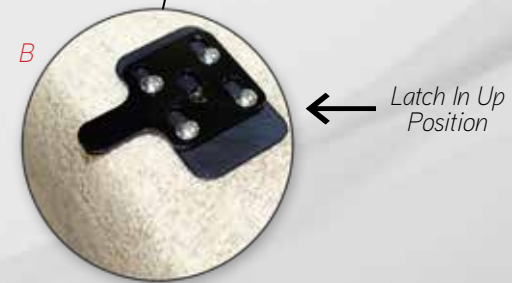

## STEP 2C

Grab one of the arm frames and place on the side of the body (See photo "E" below). Apply pressure on the arm, and slide the latch plate down in order to latch the arm and body together properly. When the latch is fastened, take 2-2" thumb bolts and connect the bottom of the arm to the seat frame.

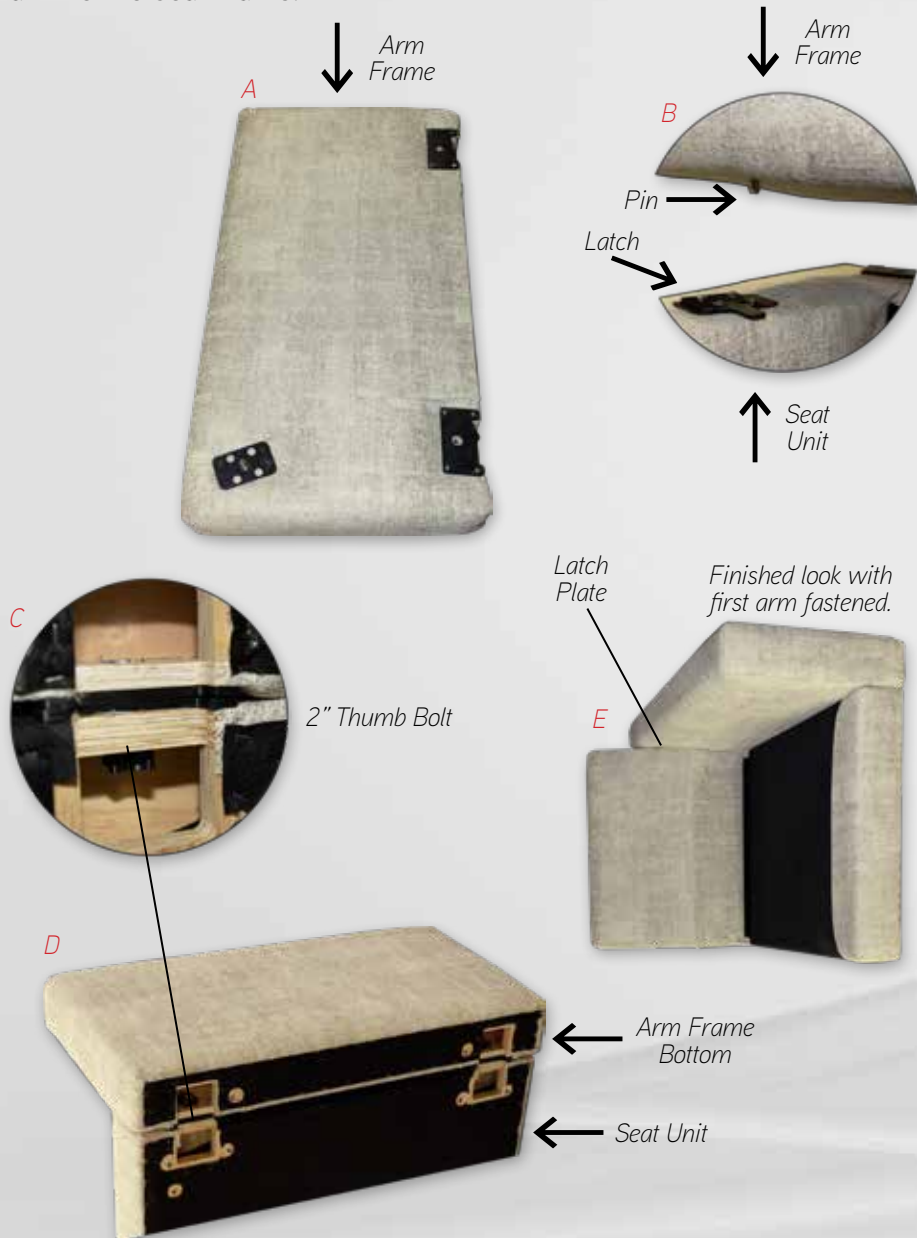

## STEP 3C

Now that the first arm is fastened to the body, flip the chair around and get ready to fasten the second arm. Repeat the process of step 2 for the second arm.





## STEP 4C

Both arms should now be attached to the body. Flip the body onto its back and get ready to fasten the legs.



## STEP 5C

Securely attach the 4 corner legs to the frame, using 2-1" thumb bolts for each plate. Make sure to install the plates correctly, like the photo shown below.

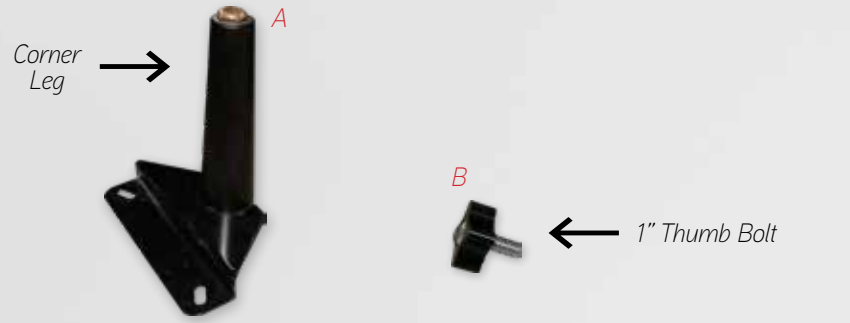

**WARNING:**  
FAILURE TO PROPERLY FASTEN AND  
TIGHTEN BOLTS CAN RESULT IN INJURIES.

## STEP 6C

Lastly, set the chair in an upright position and add the back pillow and seat pillow. Enjoy!



# Love Seat



## WHAT'S IN THE BOX...

- 2 - Seat Units
- 2 - Arm Frames
- 4 - Corner Legs
- 2 - Center Legs
- 6 - 2" Thumb Bolts
- 12 - 1" Thumb Bolts
- 2 - Back Pillows
- 2 - Seat Pillows



## STEP 1L


Rotate both seat units on their side to get the same look as photos "A" and "B" listed below. Make sure the latch plate is in the up position (As shown in photo "C").






## STEP 2L

Now, connect the arm frames to each seat unit. Grab one of the arm frames and place on the side of the first seat unit (See photo "E" below). Apply pressure on the arm, and slide the latch plate down in order to latch the arm and body together properly. When the latch is fastened, take 2-2" thumb bolts and connect the bottom of the arm to the seat frame.

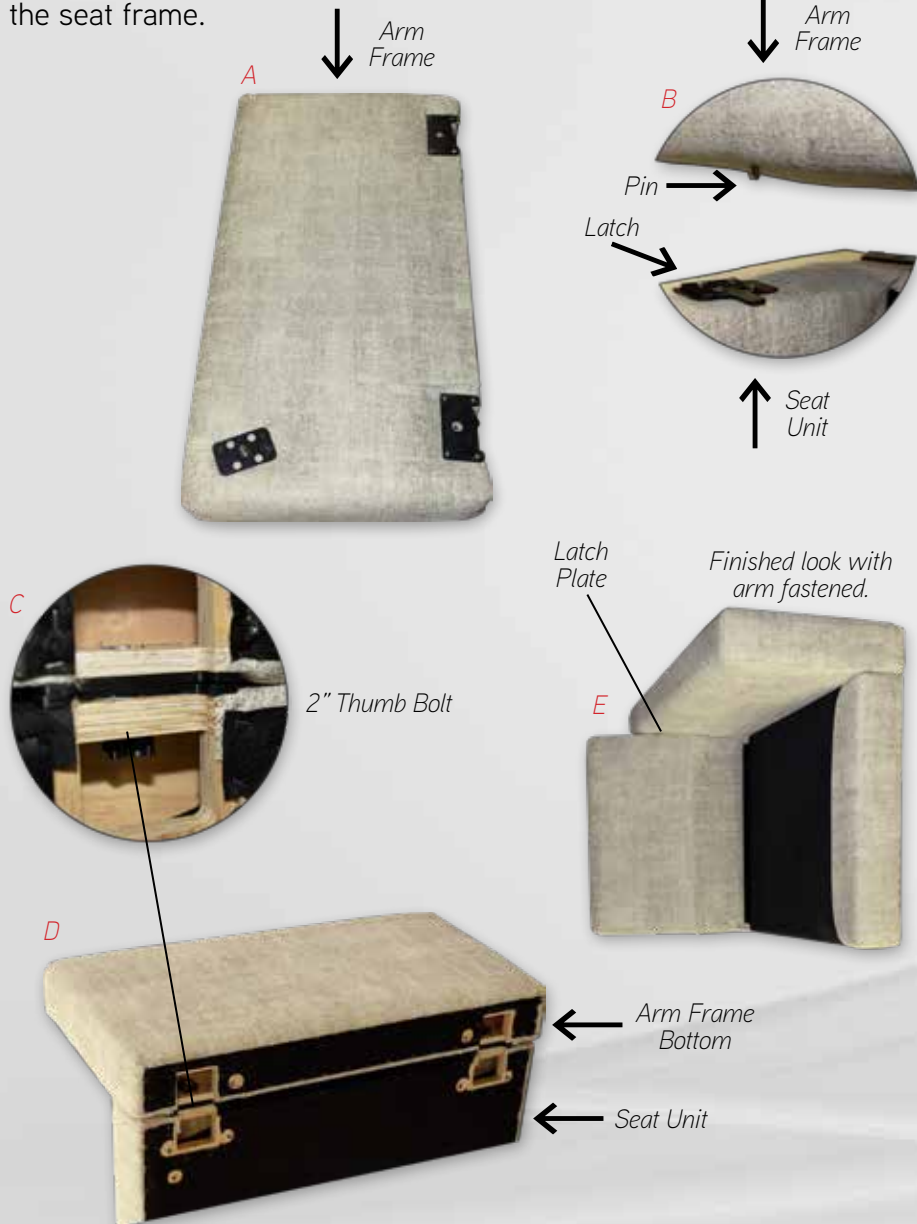

## STEP 3L

Repeat step 2L and do the same with the second arm frame and seat unit. Now, both arm frames should be fastened to each seat unit, as shown in photos "A" and "B" below. Flip the 2 seat units onto their backs, side by side, (As shown in photo "C") and slide the 2 seat units together. (Make sure the latch plate on the back is in the open position first.) Using, 2-2" thumb bolts, connect the 2 seats together, then slide the latch plate down in order to connect the backs.

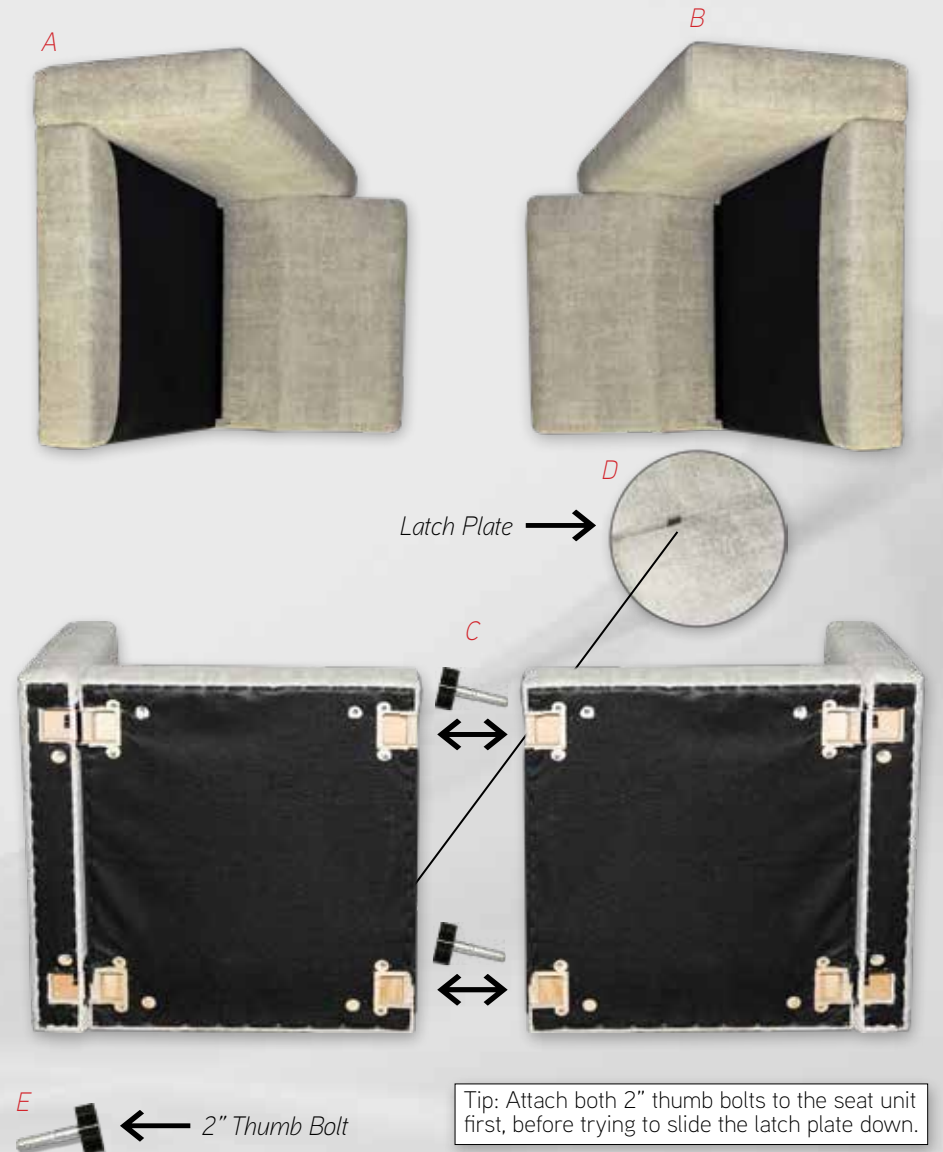

Tip: Attach both 2" thumb bolts to the seat unit first, before trying to slide the latch plate down.

## STEP 4L

Both arms and seat units should now be attached. Securely attach the 4 corner legs, and 2 center legs, using 2-1" thumb bolts for each plate. Make sure to install the plates correctly, as shown in the photos below.



**WARNING:**  
FAILURE TO PROPERLY FASTEN AND  
TIGHTEN BOLTS CAN RESULT IN INJURIES.

## STEP 5L

**Important:** It's best to have two people (one at each end) to put the love seat on its feet, so as not to apply too much pressure to the legs. Now, add the 2 seat and back pillows. Enjoy!



# Sofa


## WHAT'S IN THE BOX...

- 3 - Seat Units
- 2 - Arm Frames
- 4 - Corner Legs
- 4 - Center Legs
- 8 - 2" Thumb Bolts
- 16 - 1" Thumb Bolts
- 3 - Back Pillows
- 3 - Seat Pillows



## STEP 1S

Repeat steps 1L and 2L, connecting the 2 arm frames to 2 of the seat units. Repeat step 3L and connect all 3 seat units, using the appropriate thumb bolts.

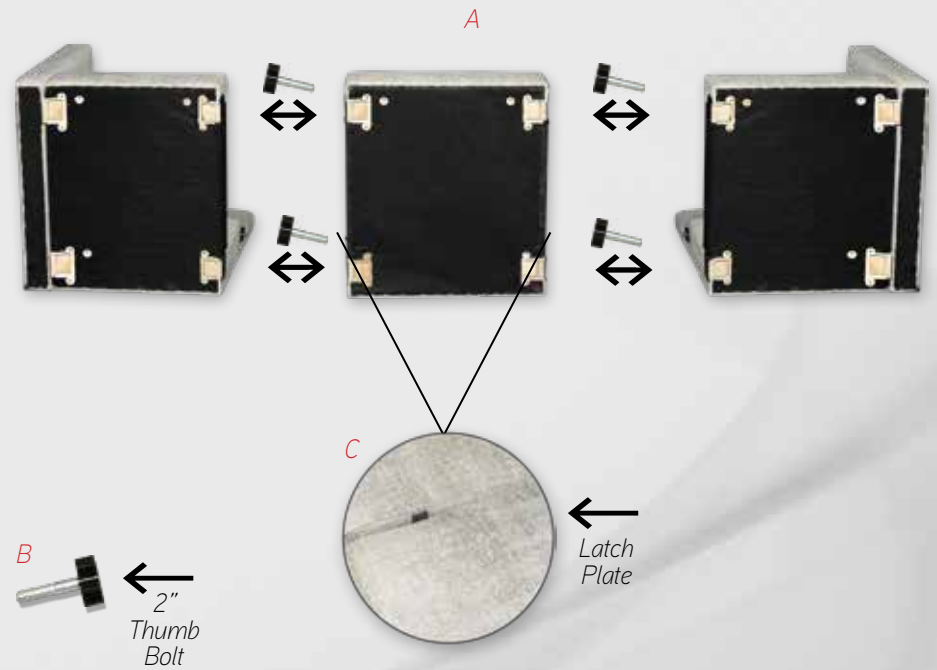

Tip: Attach both 2" thumb bolts to the seat unit first, before trying to slide the latch plate down.

## STEP 2S

Fasten the 4 corner legs, and the 4 center legs, using 2-1" thumb bolts per leg. (See photo "A" below for reference.) **Important: It's best to have two people (one at each end) to put the love seat on its feet, so as not to apply too much pressure to the legs.** Now, add the 3 seat and back pillows. Enjoy!



# Sectional

## WHAT'S IN THE BOX...

(Shown As A 5-Seater)

- 4 - Seat Units
- 1 - Corner Seat Unit
- 2 - Arm Frames
- 5 - Corner Legs
- 8 - Center Legs
- 12 - 2" Thumb Bolts
- 26 - 1" Thumb Bolts
- 6 - Back Pillows
- 5 - Seat Pillows




**WARNING:**  
FAILURE TO PROPERLY FASTEN AND TIGHTEN BOLTS CAN RESULT IN INJURIES.




## STEP 1SC

Rotate both seat units on their side to get the same look as photos "A" and "B" listed below. Make sure the latch plate is in the up position (As shown in photo "C").

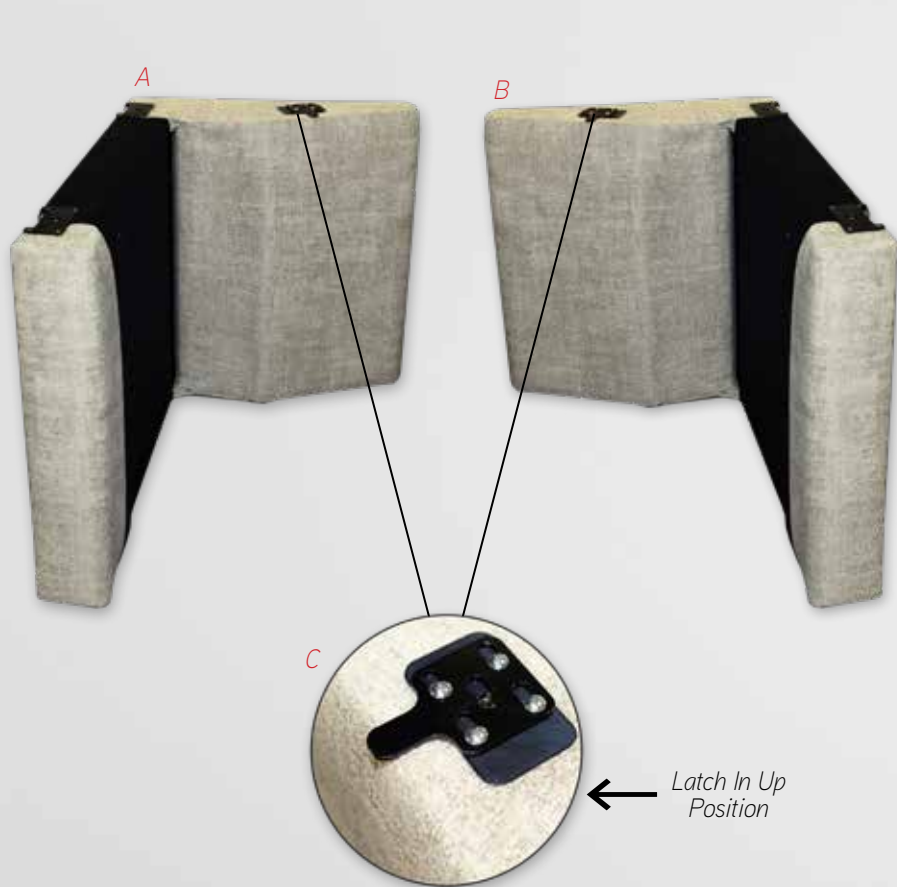

## STEP 2SC

Now, connect the arm frames to each seat unit. Grab one of the arm frames and place on the side of the first seat unit (See photo "E" below). Apply pressure on the arm, and slide the latch plate down in order to latch the arm and body together properly. When the latch is fastened, take 2-2" thumb bolts and connect the bottom of the arm to the seat frame.

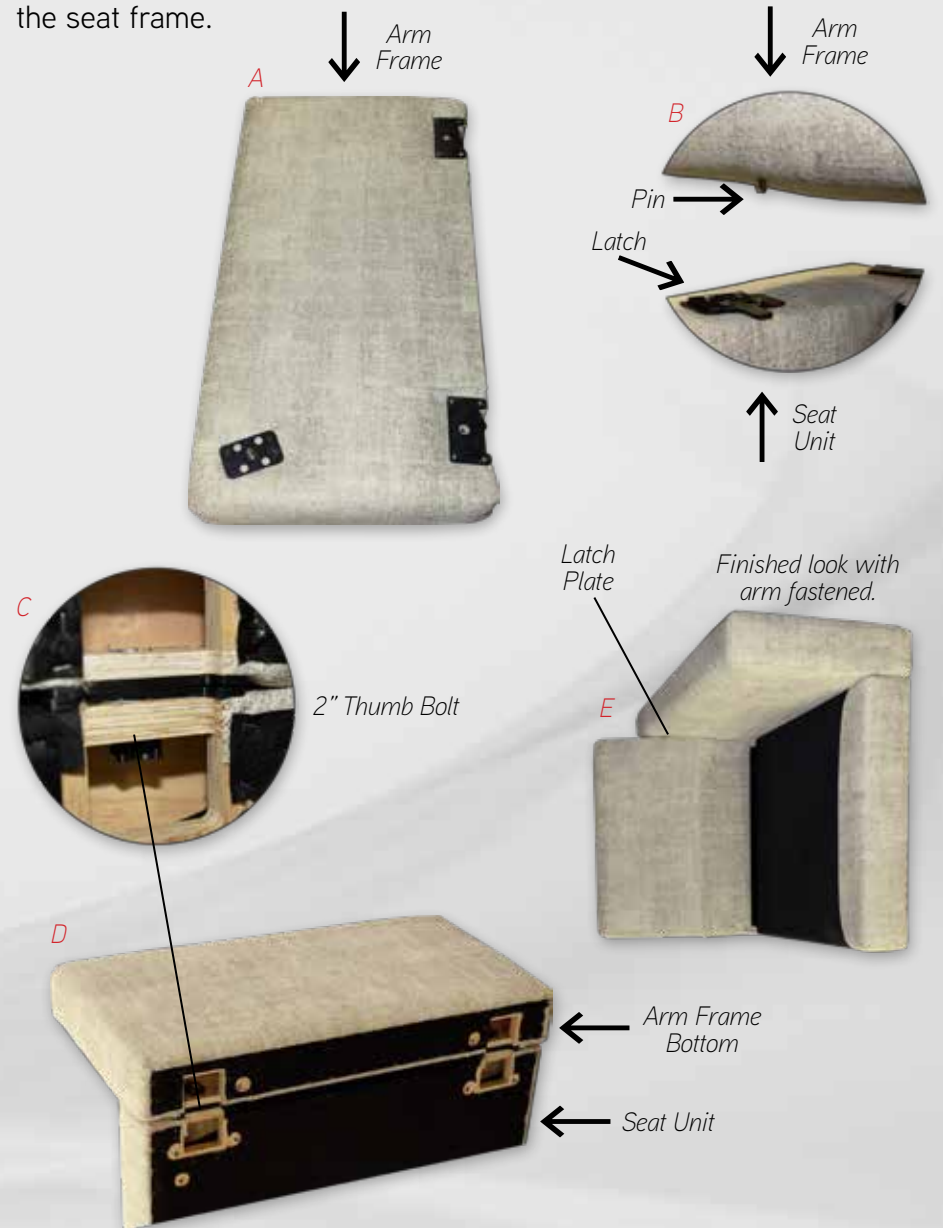


## STEP 3SC

Repeat step 2SC and do the same with the second arm frame and seat unit. Now, both arm frames should be fastened to each seat unit, as shown in photos "A" and "B" below. Flip the "right side" seat unit onto its back, and slide the units together for the "right side" (As shown in photo "C") (Make sure the latch plate on the back is in the open position first.) Using, 2" thumb bolts, connect the seats together. You have now completed the "right" portion of the sectional.



## STEP 4SC


Next, you'll find the "corner" seat unit. (See photo "A" below.) Flip the "corner" seat unit onto its back and lay it beside the "right" portion, as shown in photo "B". Secure the units together, using 2" thumb bolts. Now, the right seat unit plus the corner unit should be connected. (See photo "D".)

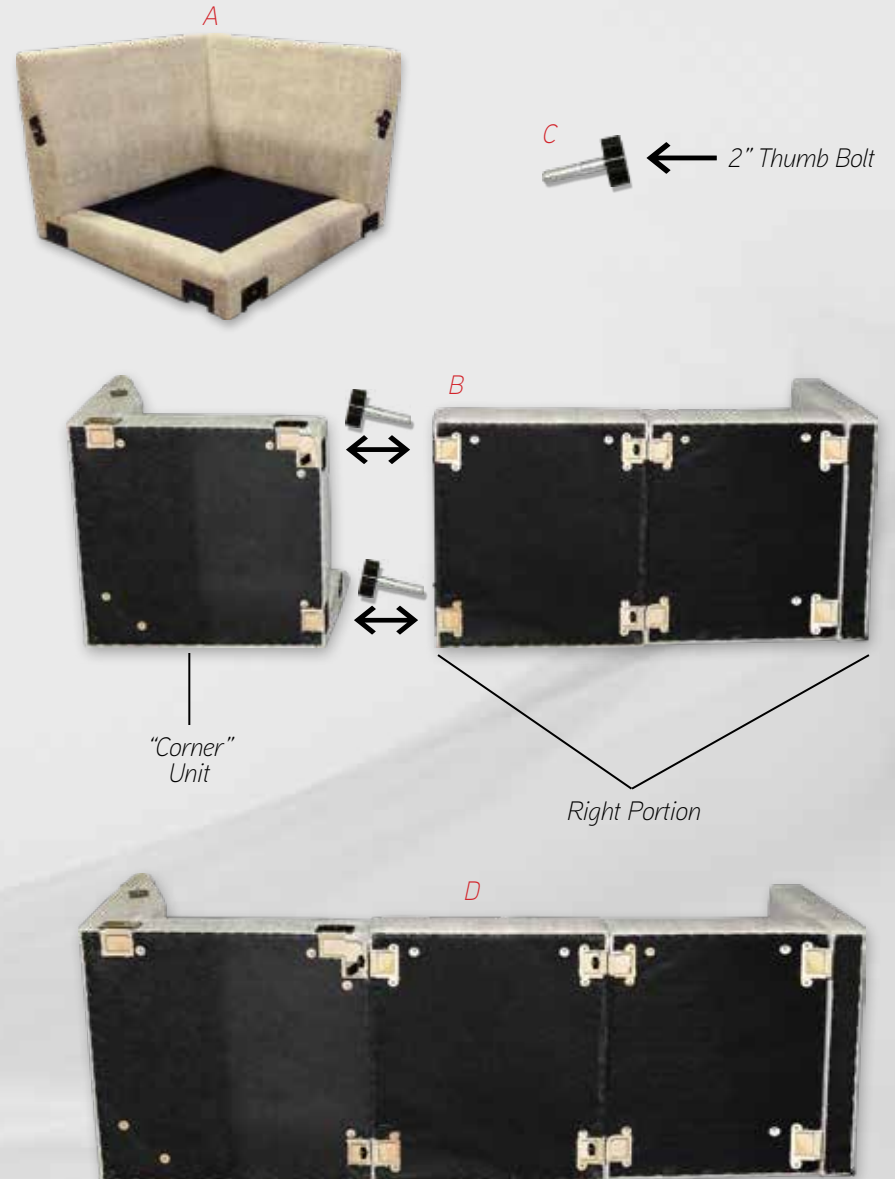

Tip: Attach both 2" thumb bolts to the seat unit first, before trying to slide the latch plate down.

## STEP 5SC

The next step will be to connect the “left” portion of the sectional, using 2” thumb bolts. Your “left” portion should now be complete.

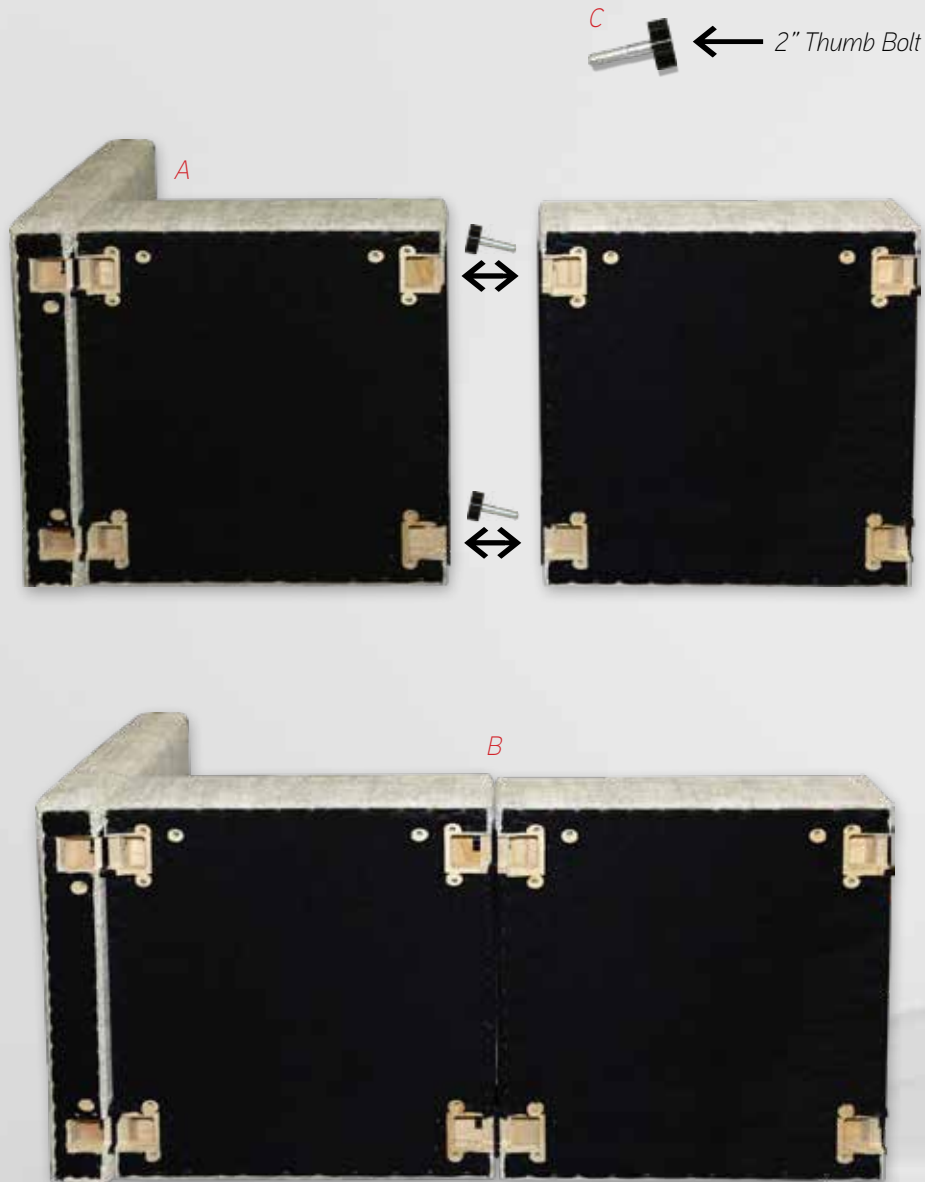

## STEP 6SC

Now, you'll need to add legs to both the “right” (Photo “A”) and “left” (Photo “B”) portions of the sectional. Using 1” thumb bolts, connect the appropriate corner and center legs as needed. Note how in photos “G” and “F”, the center legs are “hanging” over the corner unit.



**WARNING:**  
FAILURE TO PROPERLY FASTEN  
AND TIGHTEN BOLTS CAN  
RESULT IN INJURIES.


## STEP 7SC

With 2 people, first tilt the whole “right” (“A”) unit onto its legs. Do the same with the “left” (“B”) portion.



## STEP 8SC

You should have 2 center legs protruding from the “open” side of the corner unit. (Shown in photo “A” below.) Carefully lift and guide the “left” unit into place on top of the protruding leg plates of the “right” unit. Just as you have for all of the other connections, use the 2” thumb bolts to connect the 2 bodies together, and the 1” thumb bolts to connect the leg plates. **You will need to get on the ground and reach underneath to finish the final connection. You may make this connection easier with the help of a second person slightly lifting the units.** Finally, add the rest of the seat and back pillows and enjoy!





# Foot Stool

## WHAT'S IN THE BOX...

- 1 - Frame Unit
- 4 - Corner Legs
- 8 - 1" Thumb Bolts
- 1 - Pillow



## STEP 1F

Lay the unit upside down on the floor. (Shown in photo "A" below.) Secure the 4 corner legs using 2-1" thumb bolts per leg. Flip the stool onto its feet and put the pillow on top. (As shown in photo "B".) Enjoy!



# Chaise

## WHAT'S IN THE BOX...

- 1 - Frame Unit
- 2 - Corner Legs
- 2 - Center Legs
- 8 - 1" Thumb Bolts
- 1 - Pillow



## STEP 1CH

Lay the unit upside down on the floor. (Shown in photo "A" below.) Secure the 2 corner legs, and 2 center legs using 1" thumb bolts. The center legs should be "hanging" over the edge of the unit, as shown in photo "B". Carefully lift and guide the unit underneath wherever you're wanting to attach it, and secure using 2 more 1" thumb bolts. Put the pillow on top. (As shown in photo "D".) Enjoy!

